

A new generation of wheel chocks

In the folded state, it allows the storage of 2 wheel chocks in the same space, where usually only one traditional chock is stored, thus eliminating the need for a second holder.



Less weight, more performance

Innovative plastic construction with a steel core that combines low weight and high performance.




Safety first

The wheel chock is TÜV certified and meets the mechanical standards DIN76051.



Ecological

40% lighter than traditional plastic wheel chock and their production requires 50% less plastic.

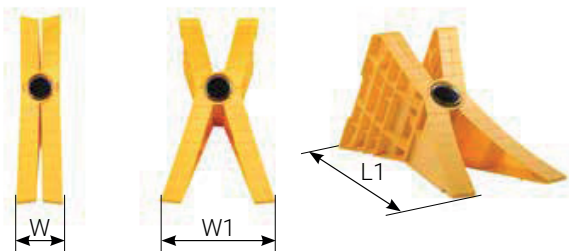

TT - number	L1 (mm)	W (mm)	W1 (mm)	Weight
0871 112.200	378	78	186	0,86 kg
0871 112.100	454	82	210	1,20 kg

Holder for two wheel chocks

The innovative holder carries 2 chocks at the same time. The holder is made of one piece of PP and is equipped with 2 elastic straps with hooks. Extremely light and easy to assemble.

TT - number	L1 (mm)	W (mm)
0871 203.000	252	81

